

Warning

Working at height and all forms of activity conducted at height are dangerous and can lead to serious injury or death.

This product is to be used only by a competent and responsible person or by those under the direction of a competent and responsible person.

Improper use of equipment can result in serious injury or death. It is the responsibility of the user to obtain proper training in rope techniques and safety prior to any activity at height and use of such equipment.

This manual is not a do-it-yourself manual, and the information presented cannot replace proper training and experience. It is a person's obligation to get adequate training in appropriate techniques and safety practises.

We have done everything possible to ensure that the information provided in this manual is accurate at the time of publication.

However, we do not guarantee that this information will remain up to date, as many products and techniques change over time.

If you have doubts or difficulty understanding anything in this manual, please contact us.

MaxGear Inc.
820 Gartshore St., Unit 9
PO Box 418
Fergus ON,
N1M 3E2 CANADA

Tel: + 1 519 787 1581
Fax: + 1 519 787 3746
Email: info@MaxGear.ca

www.MaxGear.ca

Rapier Work Positioning Lanyard

Has been created using a Low Stretch Kernmantle rope with a stitched end-termination to make it exceptional strong.

The snap hook can be positioned on the D-rings on one side while the rope grab can go to the other D-ring using a compatible carabiner (MaxGear Canadian D). The rope can go around the structure of choice to positioning oneself.

Use only as instructed, with compatible items of equipment. Misuse can cause problems, weakness, serious injury or death. Neatness is strength.

Always keep an eye out for potential falls

Limitations and proper use All components are designed and tested to specific load designations. Be aware of the designed load limitations and proper user technique. If you are not sure of proper application or user technique, seek proper training in use in tropes rescue application.

Safety

Do not alter this package in any way. Any product within the package subjected to a minor fall should be examined and discarded if there is any sign of defect or any doubts about safety. This product should be used between the temperatures of -30°C and +50°C, no more or less.



Rapier

Work Positioning Lanyard

Product #B30 2m

Product # B30 3m

IMPORTANT:

In order to ensure optimum safety and performance please study and understand these instructions before using the product.

Keep this manual for your records.

Inspection

Before each use visually inspect to ensure the product is in serviceable condition and operates correctly. An examination should be carried out at least every 12 months by a competent person. These inspections should be recorded. Pay particular attention to areas of potentially high wear.

See our info page on PPE Inspection.

Cleaning / Maintenance

Products should be washed in clean water and then left to air dry. The product can not make contact with corrosive chemicals and must not be stored in extreme temperatures. The product should be disposed of if any of these things occur:


- Does not meet inspection standards
- Has been involved in a significant fall or load
- You do not know the history of the product you are using

If any of these things occur then dispose of the product to prevent further use.

Storage

After cleaning, store in a cool, dry, and dark place away from excessive temperatures or other possible causes of damage.

If there is any doubt in your mind concerning the use of this product, do not use it!

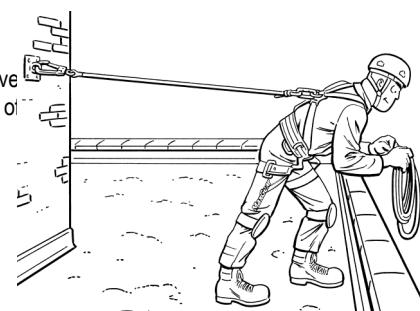

Rapier Work Positioning Lanyard

Has been created using a Low Stretch Kernmantle rope with a stitched end-termination to make it exceptional strong.

The snap hook can be positioned on the D-rings on one side while the rope grab can go to the other D-ring using a compatible carabiner (MaxGear Canadian D). The rope can go around the structure of choice to positioning oneself.

Use only as instructed, with compatible items of equipment. Misuse can cause problems, weakness, serious injury or death. Neatness is strength.

Always keep an eye out for potential falls

Limitations and proper use All components are designed and tested to specific load designations. Be aware of the designed load limitations and proper user technique. If you are not sure of proper application or user technique, seek proper training in use in rope rescue application.

Safety

Do not alter this package in any way. Any product within the package subjected to a minor fall should be examined and discarded if there is any sign of defect or any doubts about safety. This product should be used between the temperatures of -30°C and +50°C, no more or less.



Inspection

Before each use visually inspect to ensure the product is in serviceable condition and operates correctly. An examination should be carried out at least every 12 months by a competent person. These inspections should be recorded. Pay particular attention to areas of potentially high wear.

See our info page on PPE Inspection.

Cleaning / Maintenance

Products should be washed in clean water and then left to air dry. The product can not make contact with corrosive chemicals and must not be stored in extreme temperatures. The product should be disposed of if any of these things occur:


- Does not meet inspection standards
- Has been involved in a significant fall or load
- You do not know the history of the product you are using

If any of these things occur then dispose of the product to prevent further use.

Storage

After cleaning, store in a cool, dry, and dark place away from excessive temperatures or other possible causes of damage.

If there is any doubt in your mind concerning the use of this product, do not use it!

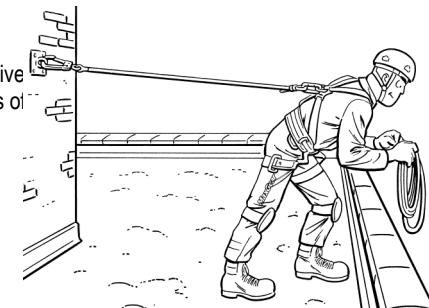

Warning

Working at height and all forms of activity conducted at height are dangerous and can lead to serious injury or death.

This product is to be used only by a competent and responsible person or by those under the direction of a competent and responsible person.

Improper use of equipment can result in serious injury or death. It is the responsibility of the user to obtain proper training in rope techniques and safety prior to any activity at height and use of such equipment.

This manual is not a do-it-yourself manual, and the information presented cannot replace proper training and experience. It is a person's obligation to get adequate training in appropriate techniques and safety practices.

We have done everything possible to ensure that the information provided in this manual is accurate at the time of publication.

However, we do not guarantee that this information will remain up to date, as many products and techniques change over time.

If you have doubts or difficulty understanding anything in this manual, please contact us.

MaxGear Inc.
820 Gartshore St., Unit 9
PO Box 418
Fergus ON,
N1M 3E2 CANADA

Tel: +1 519 787 1581
Fax: +1 519 787 3746
Email: info@MaxGear.ca
www.MaxGear.ca



Rapier

Work Positioning Lanyard

Product #B30 2m

Product # B30 3m

IMPORTANT:
In order to ensure optimum safety and performance please study and understand these instructions before using the product.

Keep this manual for your records.