



# Bungee Super Fly Harness

CE 2927

EYOLF Inc.  
PO Box 418  
Fergus ON  
N1M 3E2 CANADA

Tel: +1 519 787 1581  
Email: [info@eyolf.ca](mailto:info@eyolf.ca)

Web: [www.eyolf.ca](http://www.eyolf.ca)

Document: A420 - Bungee Harness - rev7



Figure 1

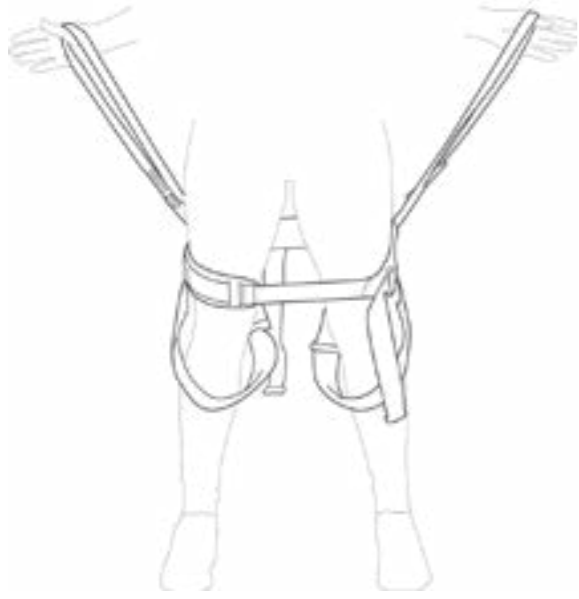


Figure 4

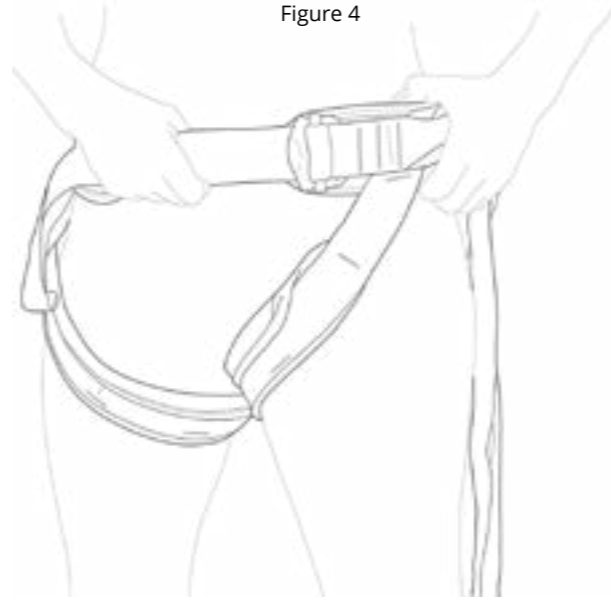


Figure 7



Figure 10



Figure 2



Figure 5



Figure 8

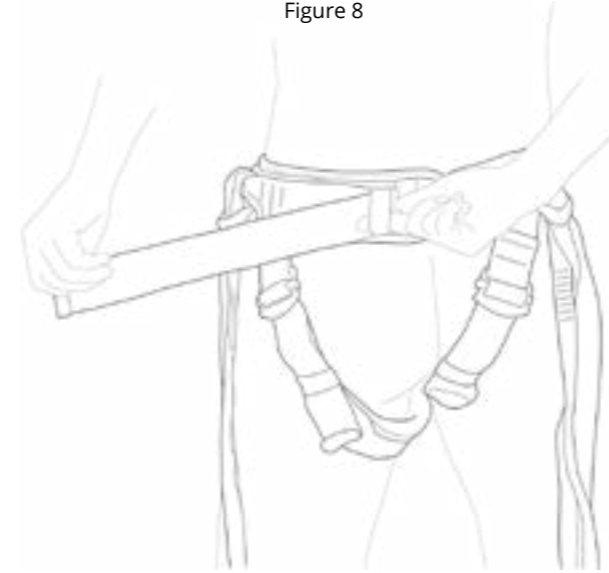


Figure 3



Figure 6

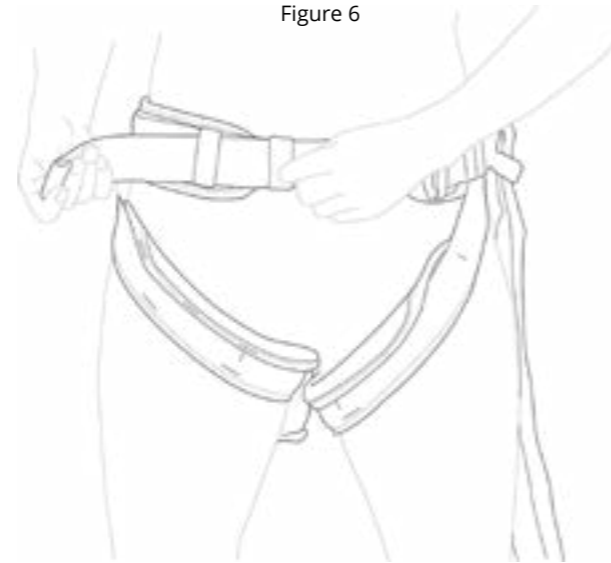


Figure 9



Figure 11

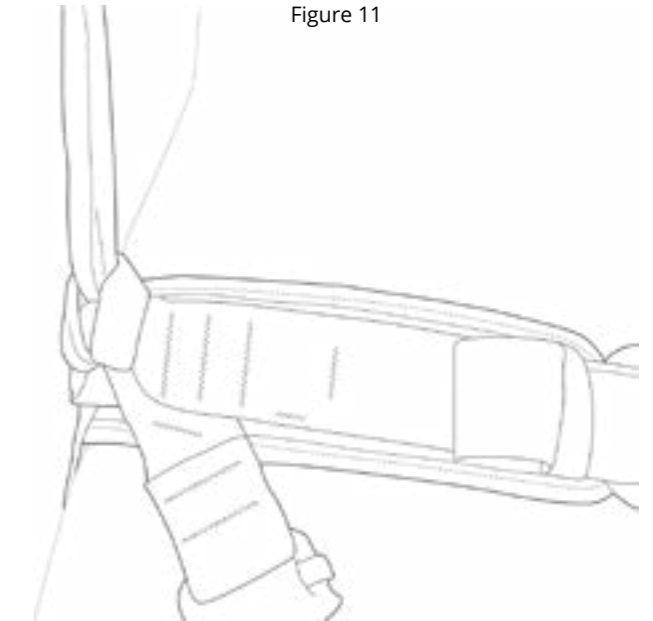


Figure 12



Figure 14



Figure 16



Figure 18



Figure 13



Figure 15



Figure 17



Figure 19



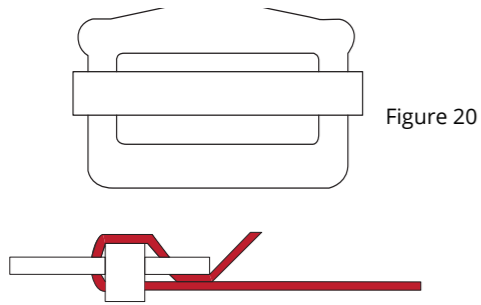


Figure 20

**Standards applied: CE - EN 12277:2015 Type C**

Notified body for EU type examination:  
**SATRA Technology Europe Ltd (2777)**, Module B  
 Bracetown Business Park - Clonee, D15 YN2P, Ireland

Notified body controlling the manufacturing of this PPE, module D:

**QUINTIN CERTIFICATIONS (2927)** - Module D  
 825 route de Romans  
 38160 Saint Antoine l'Abbaye - France

The provisions of EN 12277:2015 deal with the basic requirements and provisions of Regulation (EU) 2016/425.

**ENGLISH**

This manual provides important information, before using this product every part of this manual should be read and understood.

**A420 - Bungee Harness**

Made of Polyester webbing - MBS 15kN / WLL 150kg/330lbs

**Product specific statement** - The Bungee Harness is tested to for mountaineering, including climbing. It should be clear that inspection of the tie-in points are important and done every time before the use of this product.

**Warning**

**Training** - The harness should only be used by trained and/or otherwise competent persons or the user should be under the direct supervision of a trained and/or otherwise competent person.

**Suspension test** - Before using the harness, the user should carry out a suspension test in a safe place to ensure that the harness is the correct size, has sufficient adjustment and is of an acceptable comfort level for the intended use.

**Donning of the harness - See figures 1 to 9**

- Step 1 - First identify all the parts and lay it out.
- Step 2 - Step in the leg loops and pull up the belt. Like putting on your pants.
- Step 3 - Tighten the belt straps by pulling them away from the body.
- Step 4 - Tighten the leg straps until they fit snug.

**Sizing** - This particular harness is made to fit a wide range of users. Therefore we call this harness a universal fit or one size.

The optimum fit is when the harness sits snug below the waist and the leg loops are done up tightly. As the harness is pulled from the side the leg loops and waist will need to be fitted properly to make sure the maximum comfort is reached.

**Attachment points** - There are two attachment points on the side of the harness, which need to be set at the back part at the height of the hip bone. These attachments need to be used in pairs and cannot be used as a single attachment point!

Attachment to these points are done by girth hitching / choke hitching with a sling, meeting the EN 566 or EN 795.

**See pictures 10 - 19**

**Regular check during use** - As this harness is used in exercises where the harness is tensioned up during the downwards movement and tensioned is released during upward movements it is important to regularly check the buckles and webbing for coming undone.

**System** - This harness is part of a complete system. Do not substitute for any other part other than supplied within the system. Do not change components for alternative component without the written consent of the supplier.

**Inspection** - An examination should be carried out before the product is put into service.

Before each use visually inspect to ensure the product is in serviceable condition and operates correctly. If any compromises are found do not use the product and retire it.

If the product has been used to arrest a fall, withdrawn from use immediately! Do not use again until, in writing, a competent person says it is acceptable for use.

A pre-use check by the user may not be applicable if the user is under supervision of a competent person or in the case it is used for emergency use which have been pre-packed or sealed by a competent person.

When carrying out an inspection pay attention to the following items:

- Check the label / marking (visible, age)
- Check webbing (cuts, burns, wear, chemical marks, crushed, other damage)
- Check stitching (cut, worn, coloured or disordered threads)
- Check attachment points (cuts & wear)
- Check compatibility of connector
- Check condition of protective components

**Use of Type D harnesses** - When using a type D harness, chest harness, make sure it is in combination with a type C "sit" harness. If this advice is not followed the risk of injury could occur.

**Chemical** - Be aware that certain chemicals, for instance chlorine, acids, etc, can have a negative effect on this product. If contact might have happened do not use this product anymore.

**Cleaning** - Always keep the product clean and dry. Any excess moisture should be removed with a clean, dry cloth and then allowed to dry naturally in a warm room away from direct heat. Rinse in clean cold water. If still soiled wash in clean warm water (max. 40°C) with a soft detergent (within pH range of 5.5 to 8.5). Rinse properly in clean cold water and if needed to disinfect use a solution of water with alcohol. Do not use bleach!

**Lifespan** - This is difficult to estimate but we advise as follows: Do not use more than ten years after the date of manufacture. Assuming you have used the correct storage, the working life can vary from a ten year span to a single use in extreme circumstances (e.g. highly chemical environment, serious fall). UV light including sunlight will reduce the working life significantly.

**Storage - Transportation** - After cleaning, store unpacked in a cool, dry, and dark place away from direct sunlight, as UV will cause damage to the webbing over time, excessive heat sources, sharp edges, vibration or other possible causes of damage. Do not store when wet or in a damp area >70%. If a long shelf life is required it is advisable to store in a moisture proof package, like a polyethylene bag.

**Markings and/or symbols**

On our label you will find:

- Product name, product number (A420)
- Sizing, One Size
- DOM (date of Manufacture) in year and month
- Batch# + Individual serial #
- 2777, notified body number

**Damp and icy conditions**

Using any webbing or rope products in an damp and icy condition effects the overall performance of the product. Keep this in mind!

**Use in extreme environment**

Use of any PPE in extreme environments can be dangerous. It is important to do appropriate testing before the use of our products in environments such as extreme cold or high temperatures (working temperatures are -30 degrees up to 60 degree Celsius) chemicals, dust, sand and other foreign materials should be avoided where possible, if you have any questions contact us and we can help you determine the effects.

Sharp edges should be avoided at all times. If it cannot be avoided proper precautions should be taken.

**Country of destination**

It is essential for the safety of the user that if the product is re-sold outside the original country of destination the reseller shall provide instruction for use, for maintenance, for periodic examination and for repair in the language of the country in which the product is to be used.

**Repairs**

Do not make any alternations or additions to the product without the manufacturer's prior written consent. Repairs shall only be carried out in accordance with manufacturer's procedures. Without consent any repair or alterations should be done by the manufacturer.

**Intended use**

The product has been tested for specific use, do not use the product other than indicated without the consent of the manufacturer.

**Warranty**

Equipment offered by Eyolf Inc. are warranted against factory defects in workmanship and materials for a period of three years from date of installation or use by the owner, provided that this period shall not exceed two years from the date of shipment. Upon notice in writing, Eyolf Inc. will promptly repair or replace all defective items. Eyolf Inc. reserves the right to elect to have any defective item returned to its plant for inspection before making a repair or replacement. This warranty does not cover equipment damages resulting from abuse, damage in transit, or other damage beyond the control of Eyolf Inc. This warranty applies only to the original purchaser and is only one of applicable to our products, and is lieu of all other warranties, expressed or implied.

**FREQUENCY OF USE / APPROXIMATE LIFESPAN**

- Usage never - Keep for a maximum of 10 years
- Rarely, once a year - up to 8 years
- Occasionally, once a month - up to 7 years
- Regularly, several times a month - up to 5 years
- Frequently, each week - up to 3 year
- Constantly, daily - up to 1 year



Owner:  
Address:

Product:  
Model:  
Serial #:  
DOM:  
Date of Purchase:  
First use:

Eyolf Inc. PO Box 418 Fergus On N1M 3E2 Canada  
Tel: +1 519 787 1581 Email: info@eyolf.ca

YEAR 1	YEAR 4	YEAR 7	YEAR 9
INSPECTION RECORD	INSPECTION RECORD	INSPECTION RECORD	INSPECTION RECORD
DATE:	DATE:	DATE:	DATE:
RESULT:	RESULT:	RESULT:	RESULT:
DATE NEXT INSPECTION:	DATE NEXT INSPECTION:	DATE NEXT INSPECTION:	DATE NEXT INSPECTION:
INSPECTOR SIGNATURE:	INSPECTOR SIGNATURE:	INSPECTOR SIGNATURE:	INSPECTOR SIGNATURE:

YEAR 2	YEAR 5	YEAR 8	YEAR 10
INSPECTION RECORD	INSPECTION RECORD	INSPECTION RECORD	INSPECTION RECORD
DATE:	DATE:	DATE:	DATE:
RESULT:	RESULT:	RESULT:	RESULT:
DATE NEXT INSPECTION:	DATE NEXT INSPECTION:	DATE NEXT INSPECTION:	DATE NEXT INSPECTION:
INSPECTOR SIGNATURE:	INSPECTOR SIGNATURE:	INSPECTOR SIGNATURE:	INSPECTOR SIGNATURE:

YEAR 3	YEAR 6
INSPECTION RECORD	INSPECTION RECORD
DATE:	DATE:
RESULT:	RESULT:
DATE NEXT INSPECTION:	DATE NEXT INSPECTION:
INSPECTOR SIGNATURE:	INSPECTOR SIGNATURE:

Reason for entry inspection or repair
Defects noted, repairs carried out and other information: