



Adventure Park Lanyards







B70 - Loeding Lanyard
B72 - Loeding Y Adjustable Lanyard
B80 - Forventer Y Lanyard

EYOLF Inc.
191 Gregson Court
Fergus ON
N1M 2W8 CANADA


Tel: +1 519 787 1581
Email: info@eyolf.ca
Web: www.eyolf.ca

Document: Adventure Park Lanyards Rev5



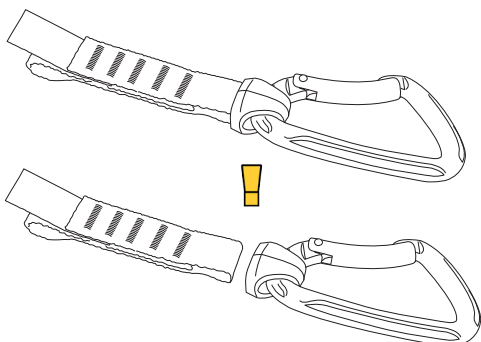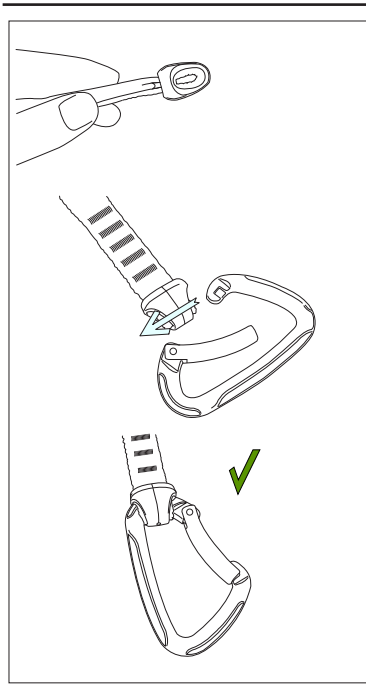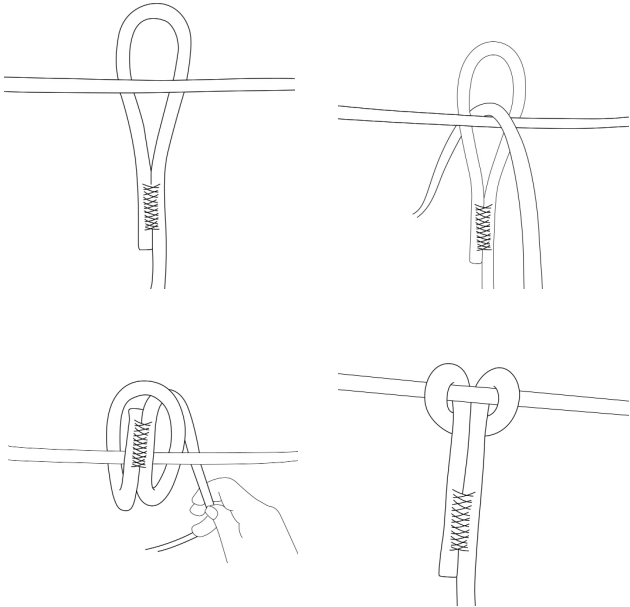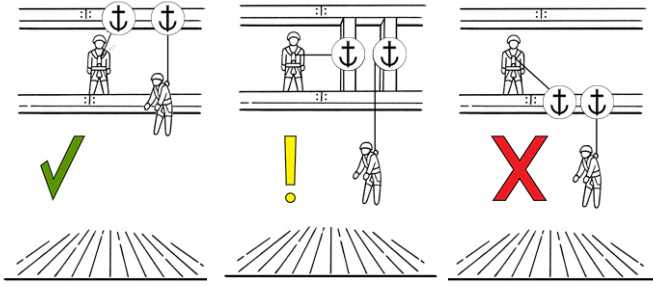


Maintenance

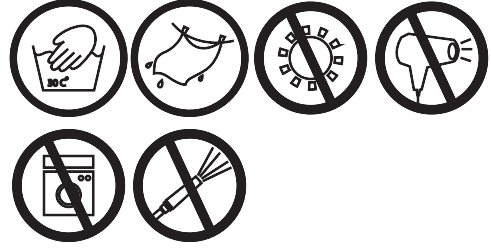

Important info



Storage

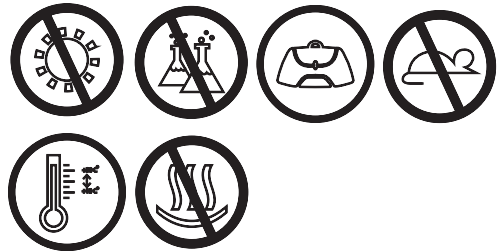

Inspection & repairs



Questions



Product code explained

B70-075-Z

Colours:

Z - Black | B - Blue

O - Orange | G - Grey

Length in cm.

Product code.

Product class.

MBS 22 kN | 5000 lbf - equally load shared on all connecting points.

SWL one person, 125kg - 275lbs

Not to be used as fall arrest without energy absorber.

ENGLISH

Thank you for using an Eyolf product. We have done everything possible to ensure that the information provided in this manual is accurate at the time of publication. However, we do not guarantee that this information will remain up to date, as many products and techniques change over time.

Mountaineering, climbing, caving, working at height and other related activities are inherent dangerous due to outside factors and hidden risks. Not understanding, taking precautions and eliminating these risks can lead to serious injuries and death.

If in doubt do not use the product!

Contact us if you have any questions or concerns.

Product specific statement

These Lanyards are designed and engineered for Adventure Parks where tie-in points are placed high.

Used on a zipline bare in mind that the lanyard is short so loose hair/clothing can get caught.

Placement on a harness

The lanyard can be girth-hitched around the tie-in point on the harness. Do keep in mind that Girth-hitches reduce the strength of the lanyard.

Regular check during use – Walking or bouncing up and down in harnesses can release the buckles. It is therefore important to regularly check the buckles and webbing to ensure nothing is coming undone.

System - This lanyard is part of a complete system, and is not to be substituted. Do not change components for alternative components without the written consent of the supplier.

Inspection - An examination should be carried out before the product is put into service.

Before each use, visually inspect to ensure the product is in serviceable condition and operates correctly. If any compromises are found, do not use the product and retire it. If the product has been used to arrest a fall, withdraw from use immediately! Do not use again until, in writing, a competent person says it is acceptable for use.

A pre-use check by the user may not be applicable if the user is under supervision of a competent person or in the case it is used for emergency use, which have been pre-packed or sealed by a competent person.

When carrying out an inspection pay attention to the following items:

Check the label / marking (visible, age)

Check webbing (cuts, burns, wear, chemical marks, crushed, other damage)

Check stitching (cut, worn, coloured or disordered threads)

Check attachment points (deformation, cracks, wear, corrosion, marks)

Check connectors (deformation, cracks, wear, corrosion, marks)

Check compatibility of connector

Check condition of protective components

Chemical - Be aware that certain chemicals (e.g. chlorine, acids, etc.) can have a negative effect on this product. If contact may have occurred, do not use this product anymore.

Cleaning - Always keep the product clean and dry. Any excess moisture should be removed with a clean, dry cloth and then allowed to dry naturally in a warm room away from direct heat.

If needed, rinse in clean cold water. If still soiled, wash in clean warm water (max. 40°C) with a soft detergent (within pH range of 5.5 to 8.5). Rinse properly in clean cold water and, if needed to disinfect, use a solution of water with alcohol. Do not use bleach!

Lifespan - This is difficult to estimate but we advise not to use more than ten years after the date of manufacture. Assuming you have used the correct storage, the working life can vary from a ten year span to a single use in extreme circumstances (e.g. highly chemical environment, serious fall). UV light, including sunlight, will reduce the working life significantly.

Storage - Transportation - After cleaning, store unpacked in a cool, dry, dark place away from direct sunlight, excessive heat sources, sharp edges, vibration or other possible causes of damage. Do not store when wet or in a damp area >70% humidity. If a long shelf life is required it is advisable to store in a moisture proof package, like a polyethylene bag.

Damp and icy conditions - Using any webbing or rope products in a damp and/or icy condition, effects the overall performance of the product. Keep this in mind!

Use in extreme environment - Use of any PPE in extreme environments can be dangerous. It is important to do appropriate testing before the use of our products in environments such as extreme low or high temperatures (working temperatures are -30 degrees up to 60 degree Celsius). Chemicals, dust, sand and other foreign materials should be avoided where possible. If you have any questions, contact us and we can help you determine the effects.

Sharp edges should be avoided at all times. If it cannot be avoided proper precautions should be taken.

Frequent use - Frequent use has a significant impact on the equipment and it shortens the lifespan. Do not use equipment damaged due to wear and tear. Inspect the equipment more often and during use if the product is used intensively, such as all day long by the same or different users.

Repairs - Do not make any alternations or additions to the product without the manufacturer's prior written consent. Repairs shall only be carried out in accordance with manufacturer's procedures. Without consent, any repair or alterations should be done by the manufacturer.

Intended use - The product has been tested for a specific use. Do not use the product other than indicated without the consent of the manufacturer.

Country of destination

It is essential for the safety of the user that if the product is re-sold outside the original country of destination the reseller shall provide instruction for use, for maintenance, for periodic examination and for repair in the language of the country in which the product is to be used.

Supervision - Under certain circumstances where a person is temporarily using a PPE against falling a competent and/or trained person could supervise the user.

Read the manual and keep it - Keep the user instructions/information accessible as a permanent record on- and off-site. Keep a copy of the manual with the product at all times.

Warranty

Equipment offered by Eyolf Inc. are warranted against factory defects in workmanship and materials for a period of three years from date of installation or use by the owner, provided that this period shall not exceed three years from the date of manufacturing (see label on product). Upon notice in writing, Eyolf Inc. will promptly repair or replace all defective items. Eyolf Inc. reserves the right to elect to have any defective item returned to its plant for inspection before making a repair or replacement. This warranty does not cover equipment damages resulting from abuse, damage in transit, or other damage beyond the control of Eyolf Inc. This warranty applies only to the original purchaser and is only one of applicable to Eyolf products, and is lieu of all other warranties, expressed or implied.

YEAR 9	
INSPECTION RECORD	
DATE:	
RESULT:	
INSPECTOR SIGNATURE:	

YEAR 10	
INSPECTION RECORD	
DATE:	
RESULT:	
INSPECTOR SIGNATURE:	

YEAR 7	
INSPECTION RECORD	
DATE:	
RESULT:	
INSPECTOR SIGNATURE:	

YEAR 8	
INSPECTION RECORD	
DATE:	
RESULT:	
INSPECTOR SIGNATURE:	

Defects noted, repairs carried out and other information

YEAR 4	
INSPECTION RECORD	
DATE:	
RESULT:	
INSPECTOR SIGNATURE:	

YEAR 5	
INSPECTION RECORD	
DATE:	
RESULT:	
INSPECTOR SIGNATURE:	

YEAR 6	
INSPECTION RECORD	
DATE:	
RESULT:	
INSPECTOR SIGNATURE:	

YEAR 1	
INSPECTION RECORD	
DATE:	
RESULT:	
INSPECTOR SIGNATURE:	

YEAR 2	
INSPECTION RECORD	
DATE:	
RESULT:	
INSPECTOR SIGNATURE:	

YEAR 3	
INSPECTION RECORD	
DATE:	
RESULT:	
INSPECTOR SIGNATURE:	



Owner:	
Address:	

Product:	
Model:	
Serial #:	
DoM:	
First use:	

Reason for entry inspection or repair